

P-PERC-182-10BB

电性能特征 Electric Performance


Eff(%)	Pmpp(W)	Vmpp(V)	Ippp(A)	Uoc(V)	Isc(A)	FF(%)
23.3	7.69	0.613	12.539	0.690	13.583	82.05
23.2	7.66	0.612	12.526	0.689	13.568	81.94
23.1	7.63	0.611	12.495	0.688	13.551	81.84
23.0	7.59	0.611	12.426	0.688	13.498	81.73
22.9	7.56	0.610	12.401	0.687	13.479	81.64
22.8	7.53	0.610	12.350	0.687	13.449	81.50
22.7	7.49	0.608	12.324	0.686	13.419	81.36
22.6	7.46	0.607	12.292	0.686	13.407	81.11
22.5	7.43	0.607	12.245	0.685	13.397	80.96
22.4	7.40	0.606	12.214	0.685	13.388	80.69
22.3	7.36	0.605	12.174	0.684	13.358	80.55
22.2	7.33	0.605	12.118	0.683	13.346	80.41
22.1	7.30	0.604	12.097	0.683	13.337	80.14
22.0	7.26	0.604	12.065	0.682	13.320	80.01
21.9	7.23	0.603	12.036	0.682	13.311	79.99
21.8	7.20	0.603	12.002	0.681	13.298	79.97

● 标准测试条件下(Under standard test condition): 1000W/ m², AM 1.5G, 25°C

温度系数 Temperature Coefficients

电流温度系数 Current Temperature Coefficient	TkCurrent: +0.052 %/K
电压温度系数 Voltage Temperature Coefficient	TkVoltage: -0.27 %/K
功率温度系数 Voltage Temperature Coefficient	TkPower: -0.34 %/K

IV曲线 IV Curve

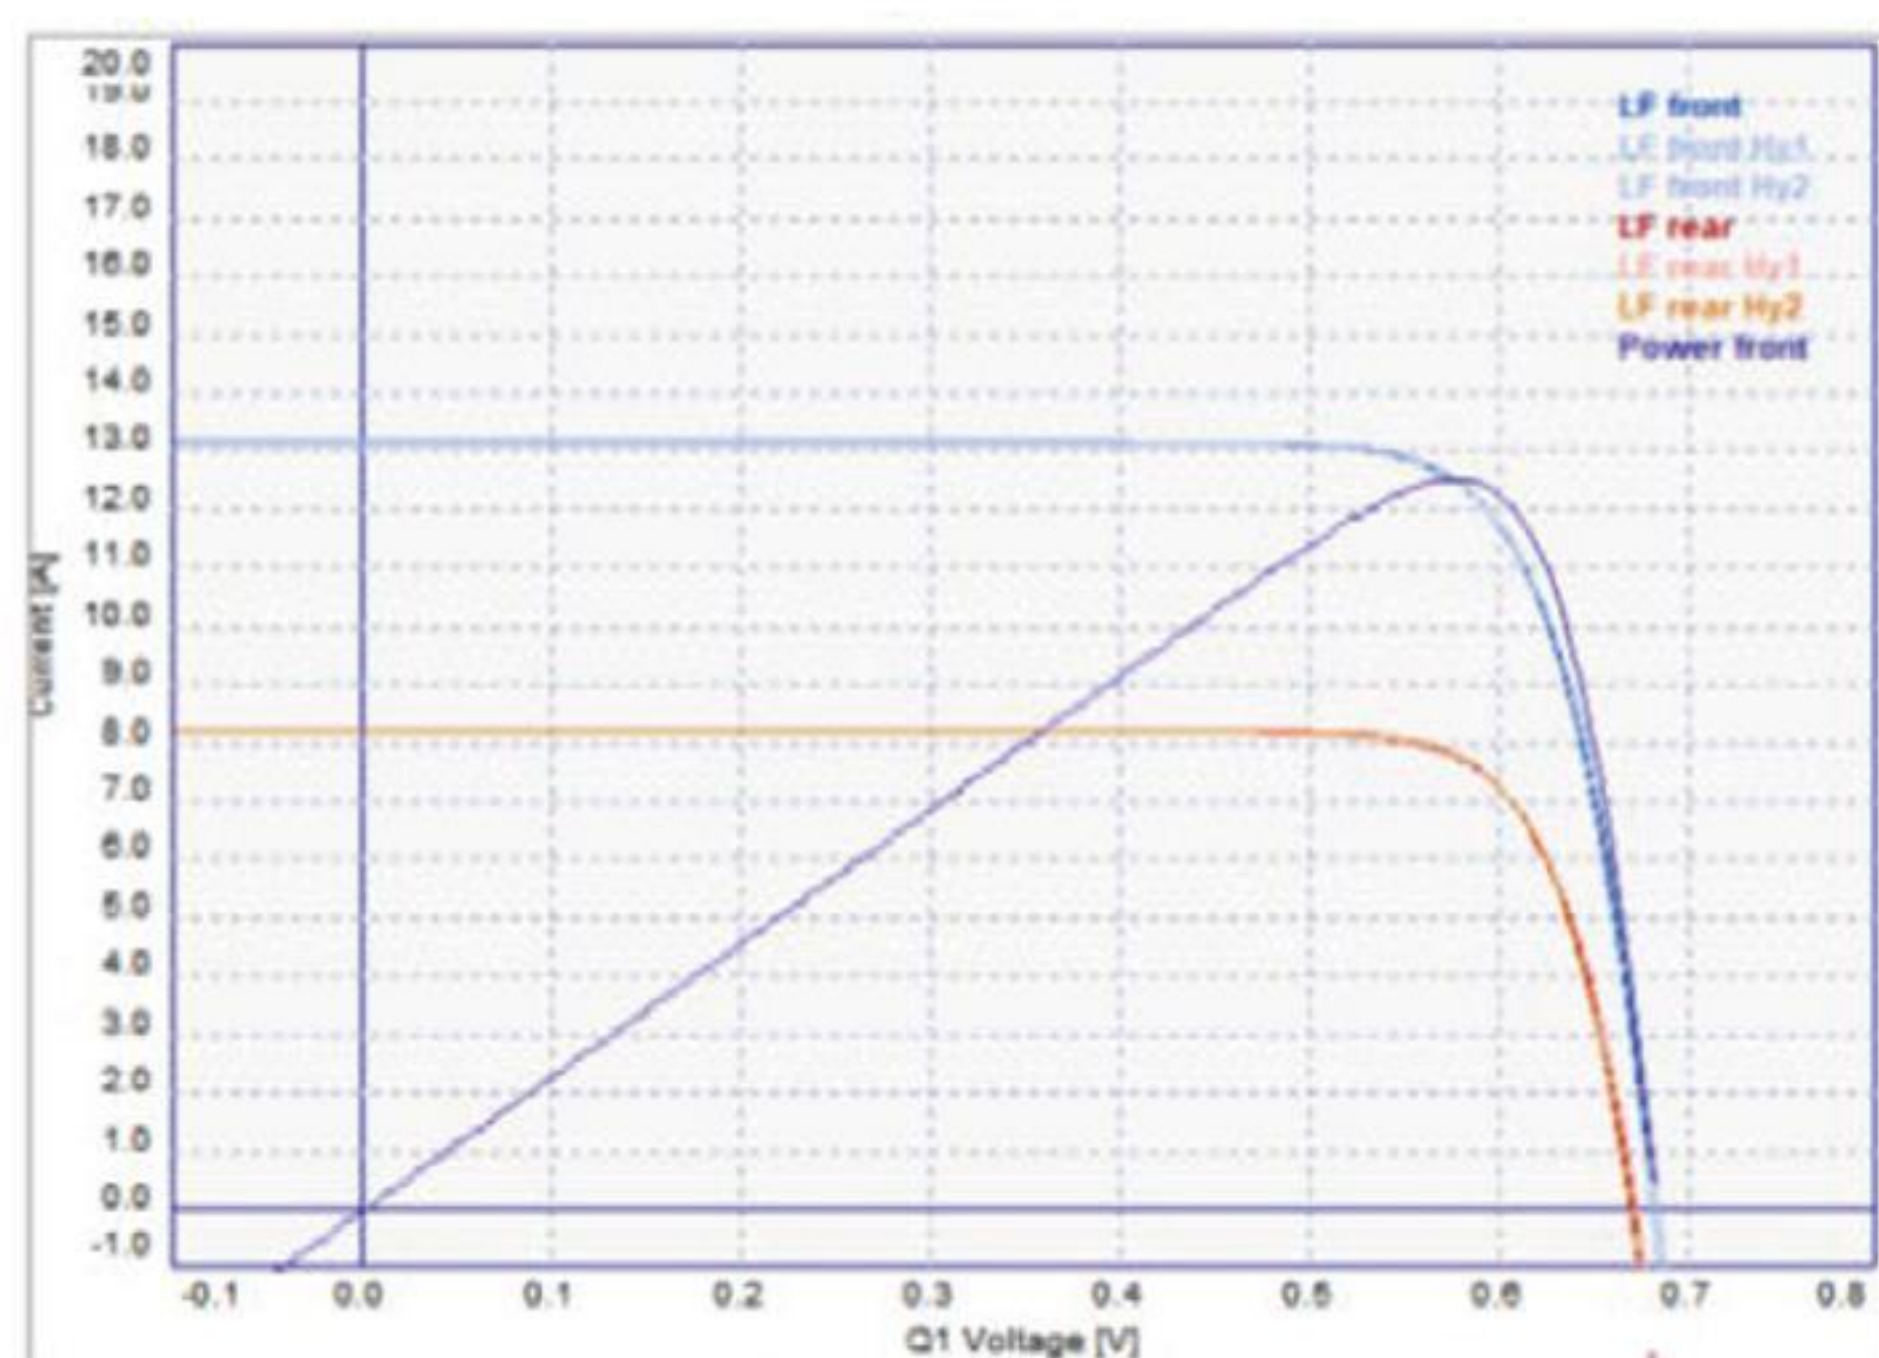

包装标准 Packing Specification

	单箱 Single box	单托 Single pallet
毛重(kg) Rough weight (kg)	21.8	616
净重(kg) Net weight (kg)	19.8	476
长*宽*高(mm) Length * width*height (mm)	515X 337 X 255	1090X1030X1150



安徽旭合新能源科技有限公司 Anhui Xuhe New Energy Technology Co., Ltd.

安徽省滁州市中新苏滁产业开发区建业路1号

No. 1, Jianye Road, SCP Suchu High-tech Industrial Development Zone, Chuzhou City, Anhui Province.

☎ 0550-3012191

🌐 www.solarnplus.com